



**Unit Price:**  
**TTI & Bank Wire:**  
**AirFreight (1pcs/case):**  
**Total Cost:**

**NAME: LED Retrofit Kits**


P/N: IERRKLED120

**Advantage:**

- UL cUL DLC certificate
- PHILIPS Chip, SUNON fan
- high CRI
- Mean Well IP65 driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long service life
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

**Application:**

- ◆ Outdoor Pole/Arm-mounted Area and Roadway Luminaires.

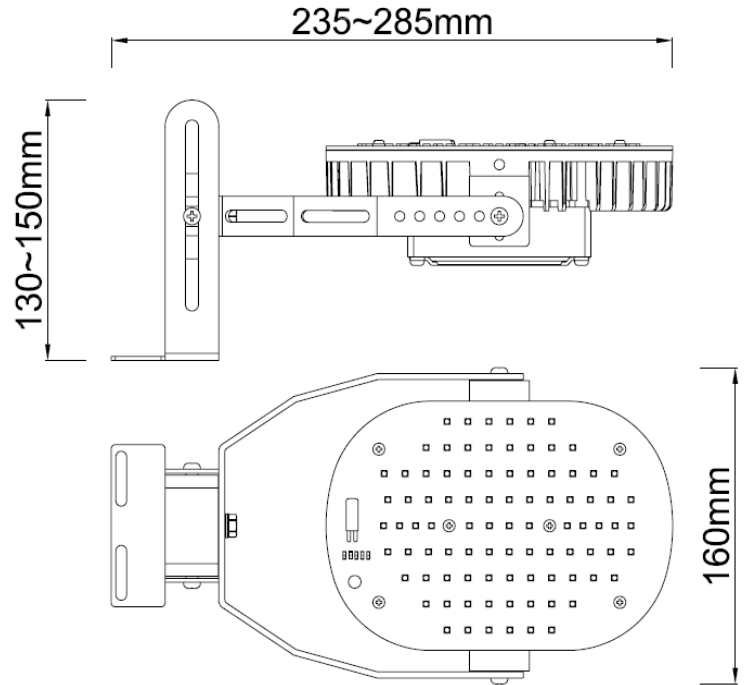

**Product Specifications**

Product name	LED Retrofit Kits
Part No	IERRKLED120
Light Type	Retrofit Kits
Dimension	(235-285) *160* (130-150) mm

**Technical Characteristic**

Color temperature	4000K	4500K	5000K	5700K
CRI	>80			
Lumen	12000-16200LM			
Input Power	120W			
Viewing Angle	120 Degree			
Input Voltage	100-277VAC 50/60Hz			
Driver model	CLG-150-24A( Mean Well Driver )			
PFC	>0.9			
Equivalent	900W incandescent / 300W CFL			
Waterproof Rating	IP40			

**Materials**

LED Brand	PHILIPS
LED Type	3030, 1.5W
LED QTY	138 PCS
Housing	Aluminum
Housing color	Gray


**Others**

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Outdoor Pole/Arm-mounted Area and Roadway Luminaires
Safety Certification	UL、cUL、DLC
Warranty Time	5 Years

**Package**

**Lamps Net Weight: 5.17 LBS/pcs**

	Size	Qty/Carton	Weight/Carton
inner box	11.5"(L)*9.9"(W)*5.2"(H)	1	6.38LBS
Outer box	20.9"(L)*12.2"(W)*11.9"(H)	4	27.72LBS

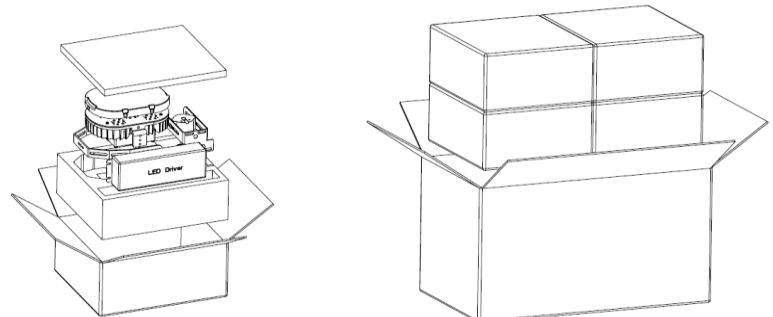

**Notice For User**

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

**Trouble Shootings**

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection